

ODIS-LED-SF


Technické podmínky montáže svítidel CZ

20.5.2025/ rev.0
www.vyrtych.cz

IP 65, třída izolace I




Dodržujte bezpečné a správné používání,
postupujte podle těchto pokynů.
Uchovejte je pro budoucí potřebu.

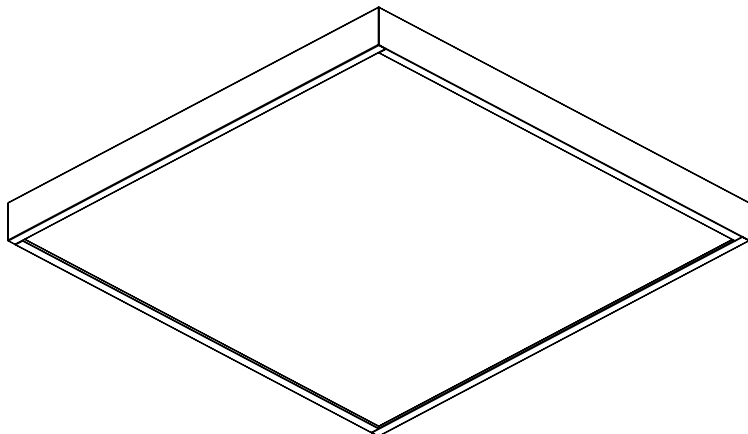

Rozměry svítidla:

Typ svítidla	Rozměry svítidla A x B [mm]	Vzdálenost montážních otvorů C x D [mm]
ODIS-LED-SF-SQ	593 x 593	400 x 400
ODIS-LED-SF-R	1196 x 296	1100 x 200

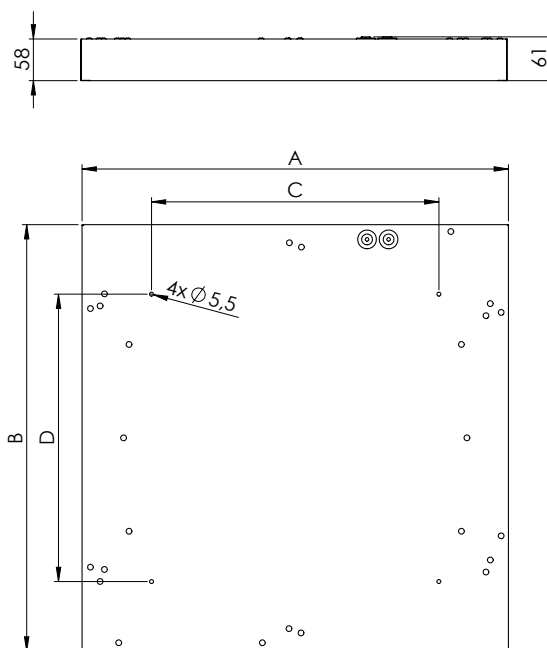

Standardní výbava:

4x podložka M5 s těsnící gumou

Maximální počet svítidel zapojených na jistič:

Uvedeno v katalogovém listu svítidla.

Základní pokyny pro uživatele svítidel:




Základní pokyny pro uživatele nouzových svítidel:




	Komponenty svítidla
1	Těleso svítidla
2	LED driver
3	Magnet
4	Reflektor
5	LED modul
6	Difuzor
7	Svorkovnice
8	Těsnící průchodka
9	Bezpečnostní šroub




Konstrukce svítidla

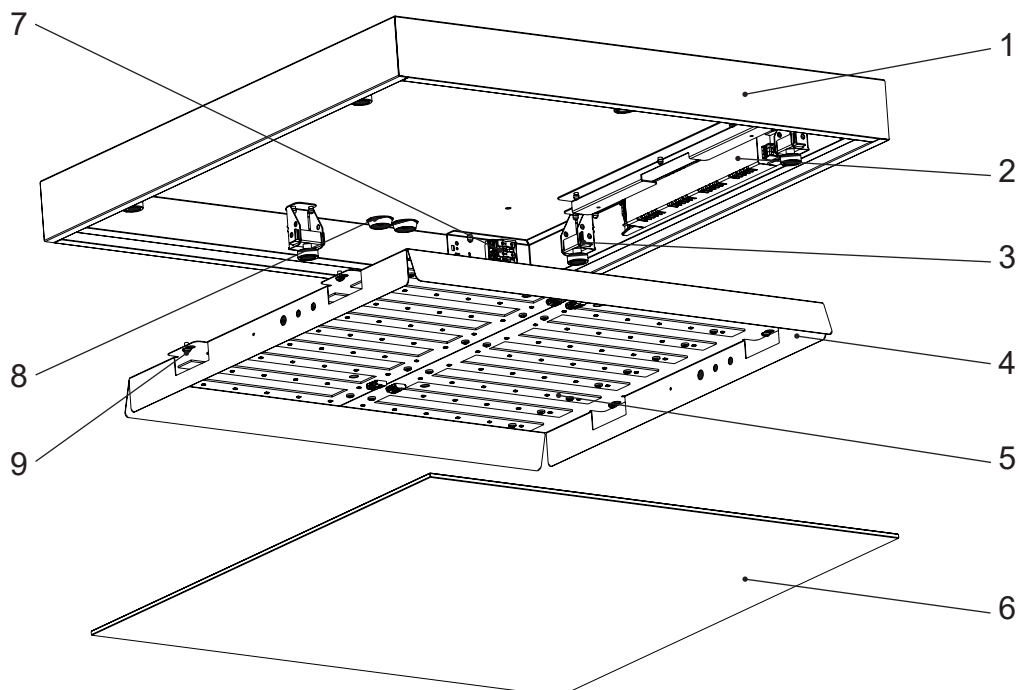

Montáž svítidla

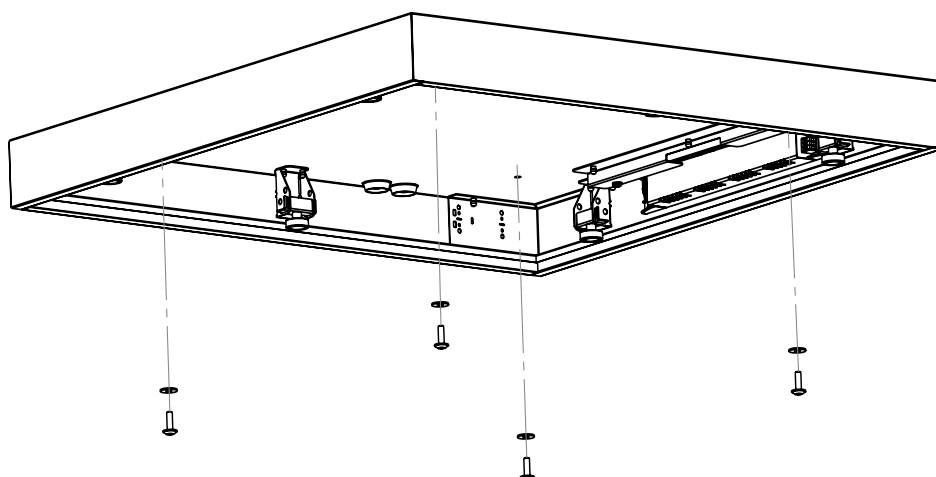

1. Na skleněný difuzor (6) přiložte přísavku (příslušenství svítidla 002021) a s její pomocí sejměte skleněný difuzor z tělesa svítidla.
2. Odšroubujte a vyjměte bezpečnostní šrouby (9) upevňující reflektor (4).
3. Reflektor vyjměte z tělesa svítidla (1). Při vyndávání reflektoru rozpojte konektory propojující driver a LED modul. Nedotýkejte se LED modulu (5).
4. Těsnící ucpávkou (8) protáhněte přívodní kabel.
5. Těleso svítidla připevněte na stěnu pomocí šroubů. Pod hlavu šroubů je nutné použít podložky z příslušenství.
6. Přívodní kabel připojte na svorkovnici (7).

SVORKA	TYP SVÍTIDLA				ODHOLENÍ VODIČE 
	ODIS-LED-SF	ODIS-LED-SF-DALI	MULTIODIS-LED-SF		
L1	fázový vodič	fázový vodič	vodič dobíjecí fáze		
L2	-	D1	vodič spínané fáze		
L3	-	D2	-		
N	nulový vodič	nulový vodič	nulový vodič		
	ochranný vodič	ochranný vodič	ochranný vodič		

7. Reflektor vložte zpět do tělesa svítidla a znovu propojte konektory propojující driver a LED modul. Reflektor opět zajistěte pojistnými šrouby. Na zajištění šroubů použijte utahovací moment 1-2 Nm.
8. Svítidlo zaklopte skleněným difuzorem, který se přichytí na magnety (3) uvnitř svítidla.

ODIS-LED-SF

Technical conditions of the luminaires installation

ENG


20.5.2025/ rev.0

www.vyrtych.cz

IP 65, Protection class I




Always follow these instructions for safe and correct use. Keep them for future reference.

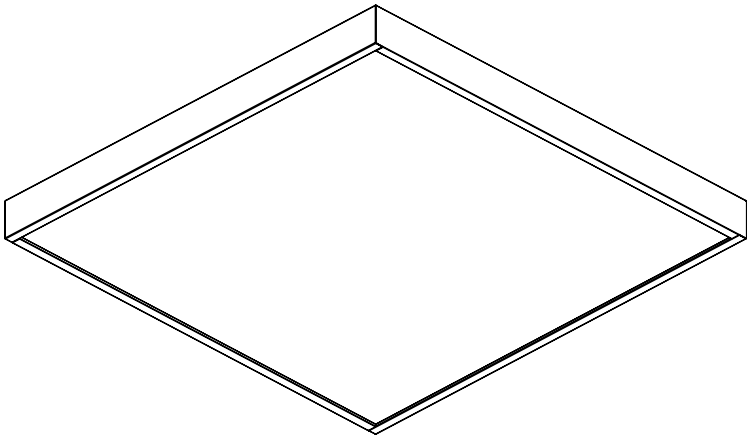

Dimensions of the luminaire:

Type of luminaire	Dimensions of the luminaire A x B [mm]	Distance between mounting holes C x D [mm]
ODIS-LED-SF-SQ	593 x 593	400 x 400
ODIS-LED-SF-R	1196 x 296	1100 x 200

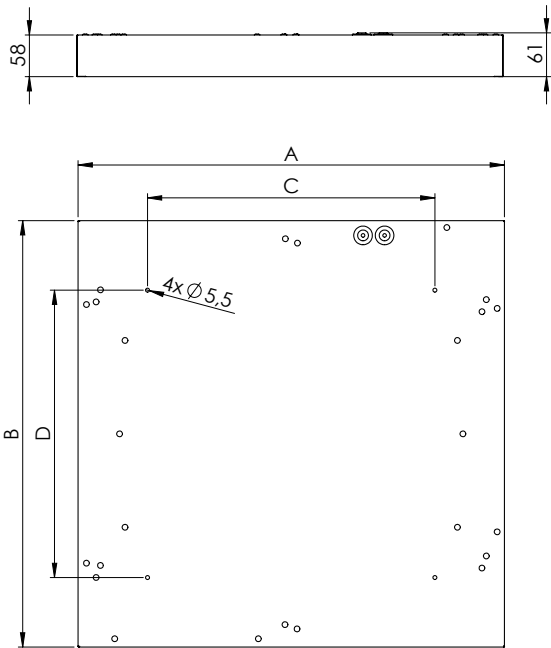

Standard equipment:

4x washer M5 with sealing rubber

Maximum number of luminaires connected to a circuit breaker:

Specified in the luminaire catalog sheet.

Basic instructions for users of luminaires:




Basic instructions for users of emergency luminaires:




	Luminaire construction
1	Luminaire body
2	LED driver
3	Magnet
4	Metal reflector
5	LED module
6	Glass diffuser
7	Terminal block
8	Sealing grommet
9	Safety screws


Luminaire construction

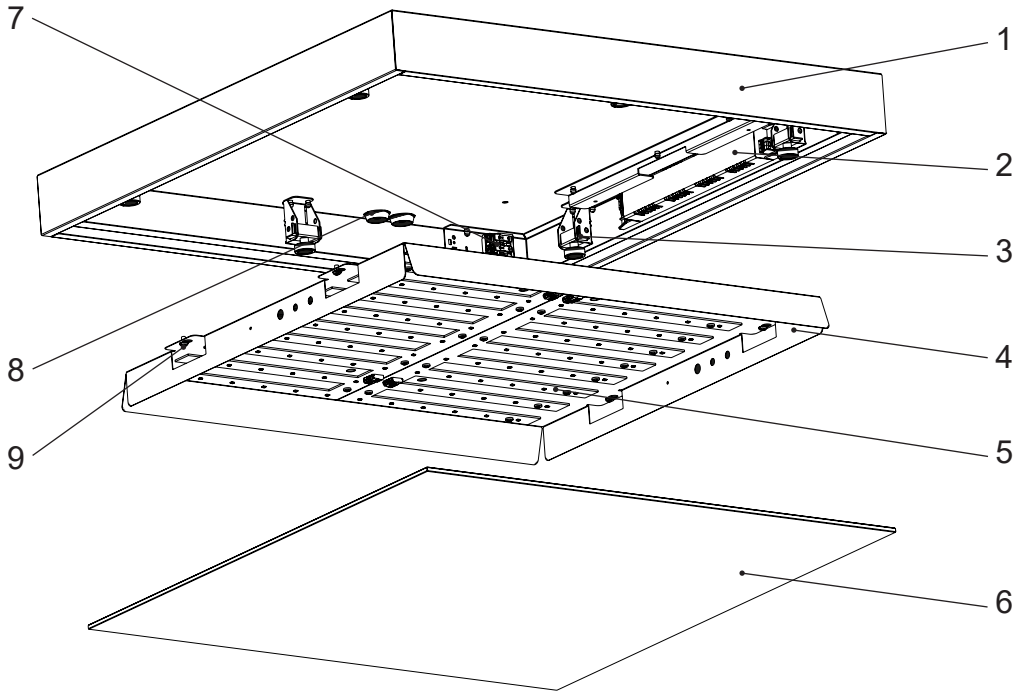

Luminaire mounting

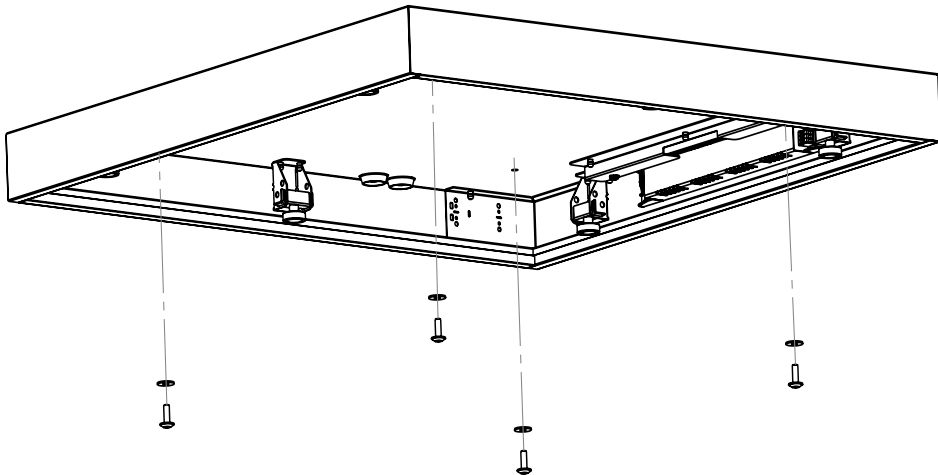

- Put a suction cup (luminaire accessory 002021) on the glass diffuser (6) and use it to remove the glass difusser from the luminaire body.
- Unscrew and remove the safety screws (9) securing the reflector (4).
- Remove the reflector from the luminaire body (1). When removing the reflector, disconnect the connectors between the driver and the LED module. Do not touch the LED module of the luminaire (5).
- Pull the supply cable through the sealing grommet (8).
- Mount the luminaire to the wall using screws. Washers from the equipment must be used under the screw heads.
- Plug in the supply cable into the free part of the supply terminal block (7) as follows:

CLAMP	TYPE OF LUMINAIRE			STRIPPING THE CONDUCTOR
	ODIS-LED-SF	ODIS-LED-SF-DALI	MULTIODIS-LED-SF	
L1	phase conductor	phase conductor	charging phase conductor	
L2	-	D1	switching phase conductor	
L3	-	D2	-	
N	neutral conductor	neutral conductor	neutral conductor	
⊕	protective conductor	protective conductor	protective conductor	

- Put the reflector back into the luminaire body and reconnect the connectors between the driver and LED module. Secure the reflector again with the locking screws. Use a tightening torque 1-2 Nm to secure the screws.
- Cover the luminaire with glass diffuser, which is held in place by magnets (3) inside the luminaire.